





Nothing but **HEAVY DUTY.**



M12 BI


Original instructions













V Technical Data, Safety Instructions, Specified Conditions of Use, EC-Declaration of Conformity, Batteries, Maintenance, Symbols
Please read and save these instructions!






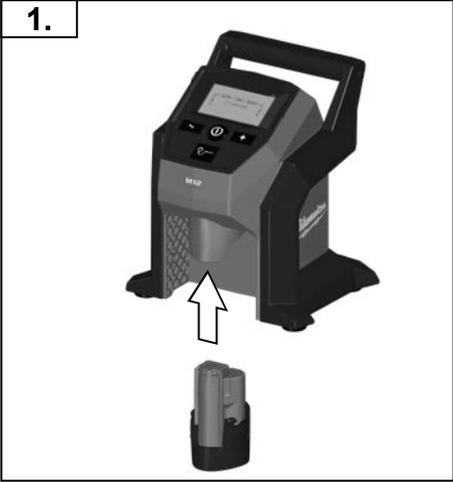

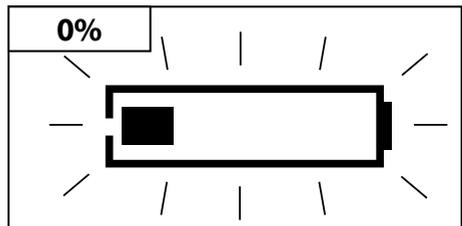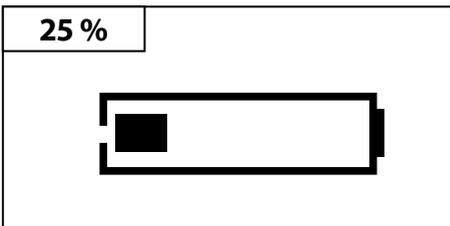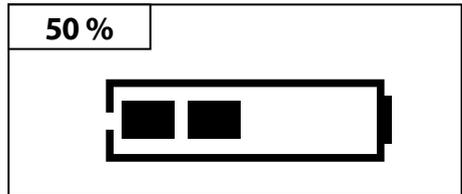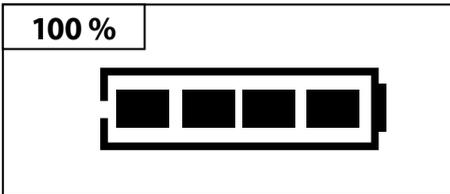

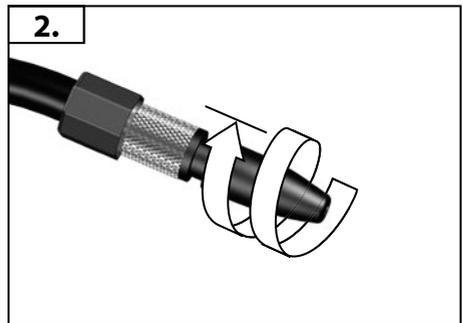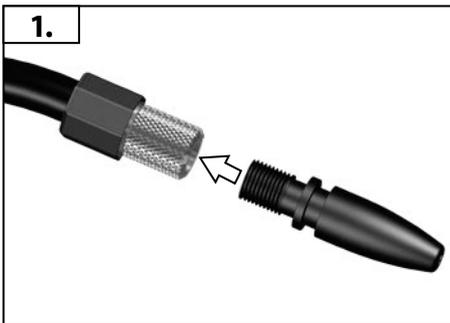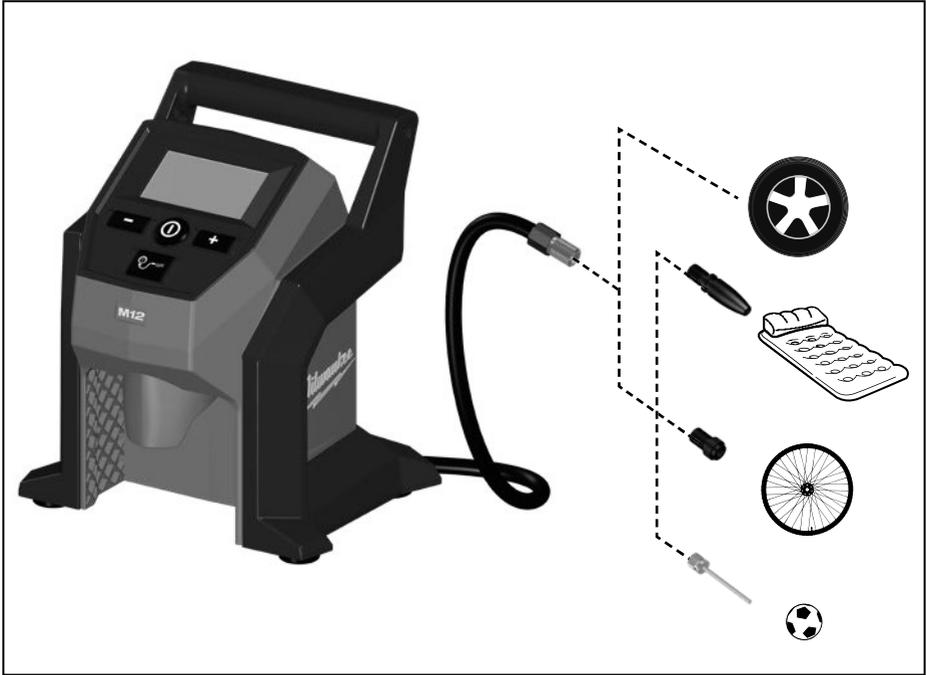

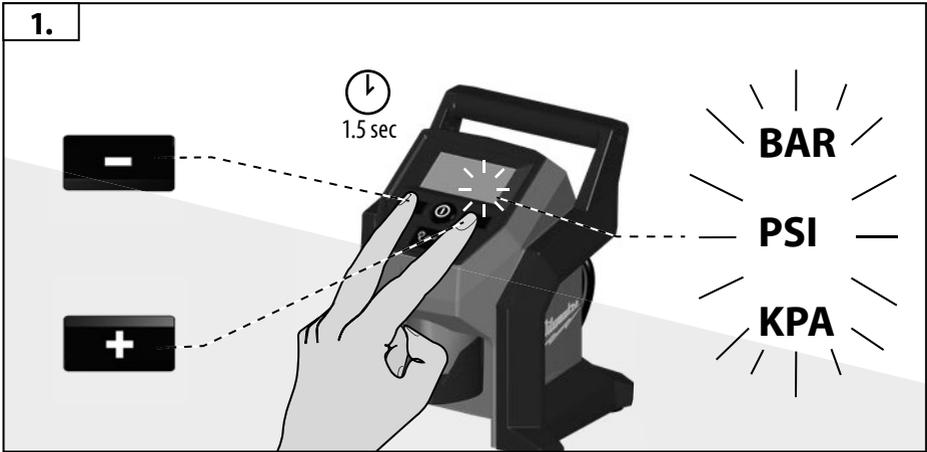

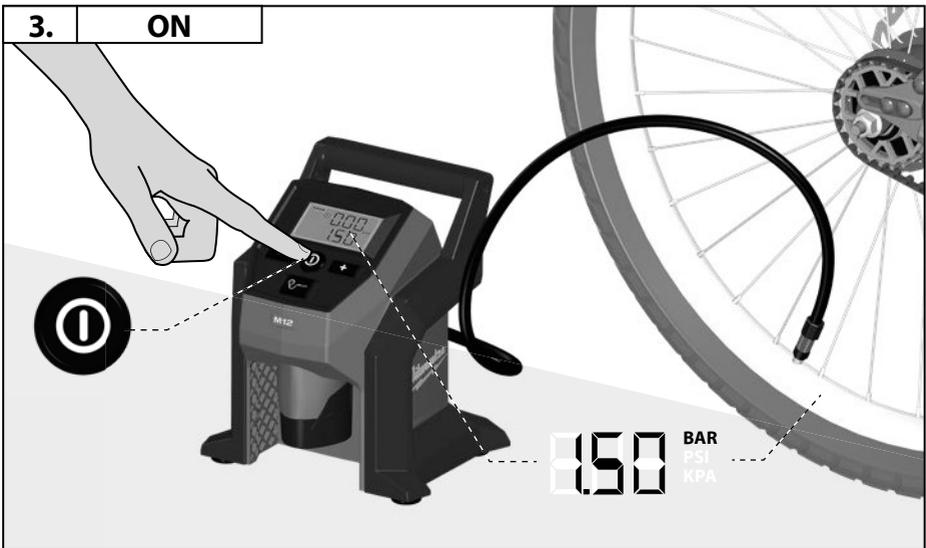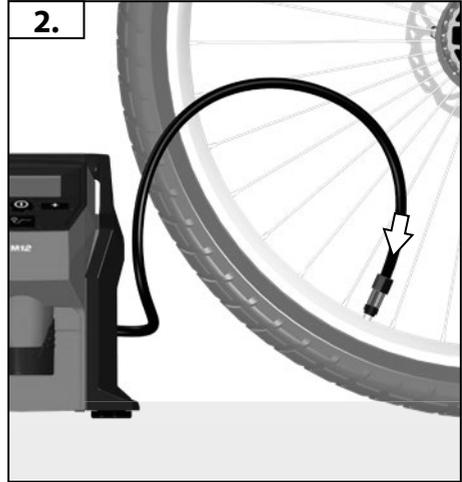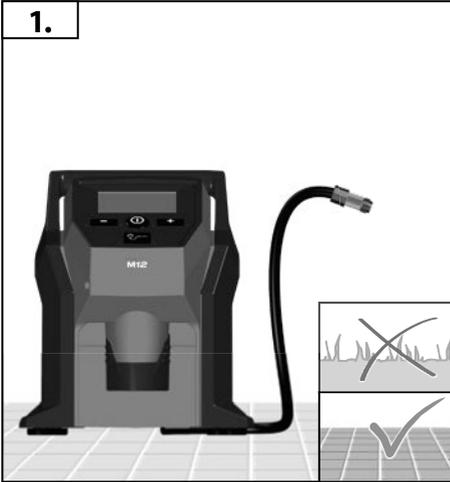



4. A

	(min.)	(max.)	
-	0.30 ...	8.27	BAR
	5 ...	120	PSI
	30 ...	827	KPA

+

<1 sec

- ±0.05 BAR
- ±1 PSI
- ±5 KPA

>1 sec



- ±0.5 BAR
- ±5 PSI
- ±50 KPA








5. A START

max. 10 min.

6. A AUTOSTOP

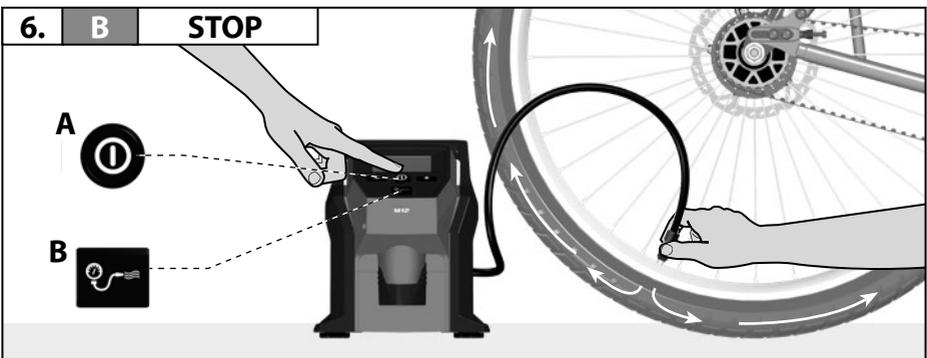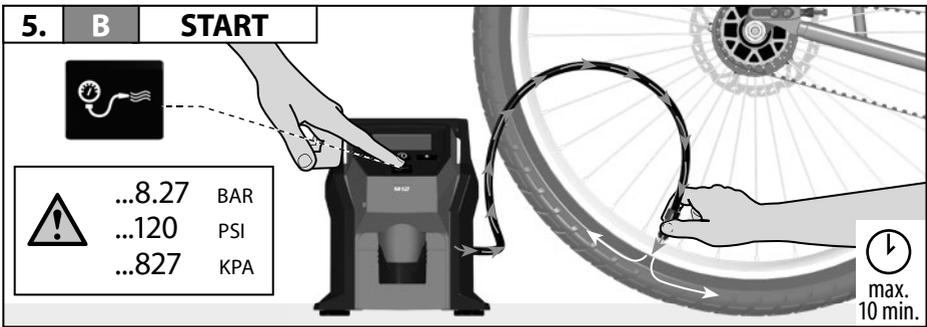

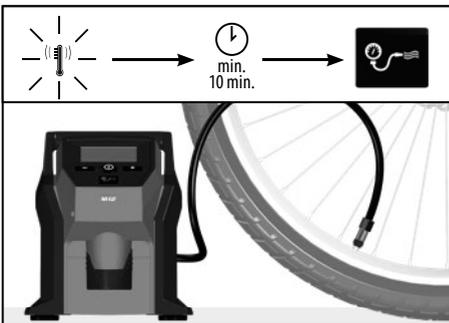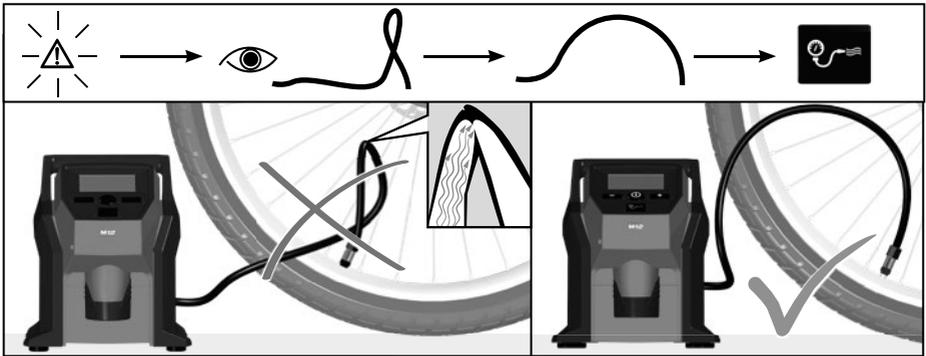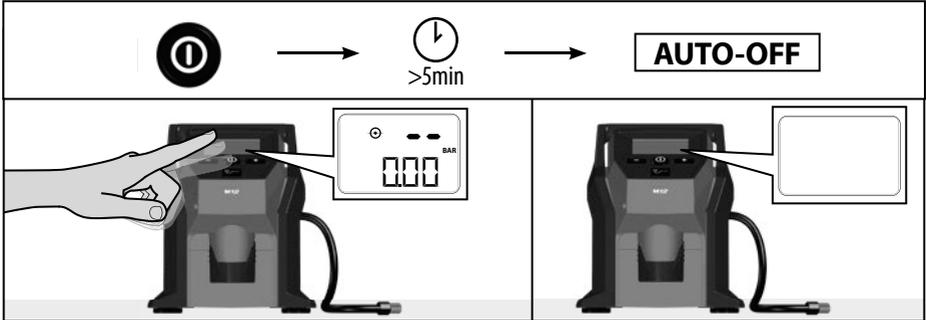

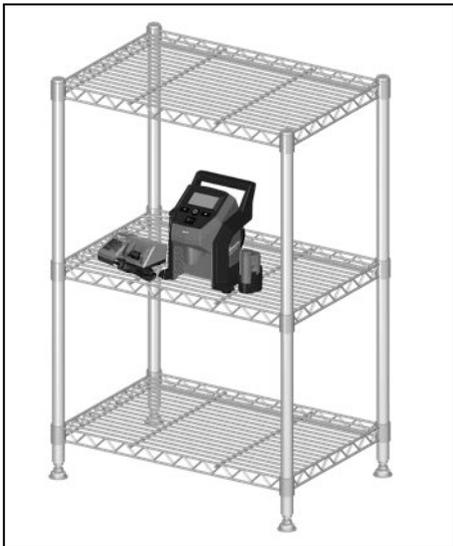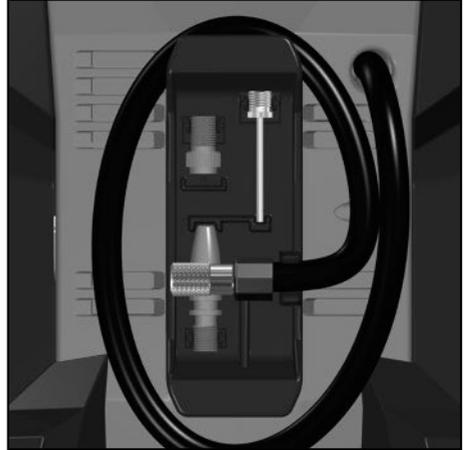

TECHNICAL DATA	M12 BI
Inflator	
Production code	4674 79 01... ... 000001-999999
Battery voltage	12 V
Input power	120 W
Max. pressure	120 PSI; 8,27 bar; 827 KPA
Air delivery rate @ 0 psi / 0 bar / 0 kPa	24,9 l/min
Air delivery rate @ 35 psi / 2,41 bar / 241 kPa	17,8 l/min
Recommended Ambient Operating Temperature	-18°C ... +50°C
Recommended battery types	M12B...
Recommended charger	C12C; M12C4; M12-18 ...
Pressure hose length	66 cm
Weight without battery	1,42 kg
Weight according EPTA-Procedure 01/2014(Li-Ion 2,0 ... 6,0 Ah)	1,59 ... 1,83 kg

⚠ WARNING Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury. **Save all warnings and instructions for future reference.**

⚠ INFLATOR SAFETY WARNINGS

Always wear goggles and ear protection when using the machine. Do not leave the appliance unsupervised when it is switched on. Never direct any compressed air or blow any dust toward people or animals.

Do not use the device in rooms with a potentially explosive atmosphere.

Risk of Bursting. Do not overinflate. Follow all manufacturer's instructions for the item. Do not set the tool to an output pressure greater than marked maximum pressure of item to be inflated. Never block or plug the air outlet during operation.

Check air hose for wear or damage before each use. Check all accessory connections are secure.

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.

Children shall not play with the appliance.

Cleaning and user maintenance shall not be made by children without supervision.

Have damage repaired immediately by an authorised workshop.

Following 10 minutes of continuous operation, a short break of at least 10 minutes must be taken to allow the device to cool down. Remove the battery pack before starting any work on the appliance.

To avoid injury and damage, never immerse the tool, removable battery or charger in liquid or allow liquid to penetrate them.

Use only System M12 chargers for charging System M12 battery packs. Do not use battery packs from other systems.

Never break open battery packs and chargers and store only in dry rooms. Keep dry at all times.

To reduce the risk of fire, personal injury, and product damage due to a short circuit, never immerse your tool, battery pack or charger in fluid or allow a fluid to flow inside them. Corrosive or conductive fluids, such as seawater, certain industrial chemicals, and bleach or bleach containing products, etc., can cause a short circuit.

SPECIFIED CONDITIONS OF USE

The inflator is intended to inflate items such as car tires, bike tires, lawn equipment tires, sports equipment, air mattresses, beach toys and other inflatables.

Do not use this tool to fill air tanks or shocks. Do not use this tool as a breathing device. Do not use this tool to spray chemicals.

MAINTENANCE

Remove the battery pack before starting any work on the appliance.

The ventilation slots of the machine must be kept clear at all times. Service and repair work may only be carried out by authorised specialist workshops.

If the tool does not start or operate at full power with a fully charged battery pack, clean the contacts on the battery pack.

If the tool still does not work properly, return the tool, charger and battery pack, to a MILWAUKEE service facility for repairs.

Use only Milwaukee accessories and Milwaukee spare parts. Should components need to be replaced which have not been described, please contact one of our Milwaukee service agents (see our list of guarantee/service addresses).

If needed, an exploded view of the tool can be ordered. Please state the Article No. as well as the machine type printed on the label and order the drawing at your local service agents or directly at: Techtronic Industries GmbH, Max-Eyth-Straße 10, 71364 Winnenden, Germany.

BATTERIES

Temperatures in excess of 50°C (122°F) reduce the performance of the battery pack. Avoid extended exposure to heat or sunshine (risk of overheating).

The contacts of chargers and battery packs must be kept clean.

For an optimum life-time, the battery packs have to be fully charged, after use. Battery packs which have not been used for some time should be recharged before use.

To obtain the longest possible battery life remove the battery pack from the charger once it is fully charged.

For battery pack storage longer than 30 days:, Store the battery pack where the temperature is below 27°C and away from moisture, Store the battery packs in a 30% - 50% charged condition, Every six months of storage, charge the pack as normal.

Do not dispose of used battery packs in the household refuse or by burning them. Milwaukee Distributors offer to retrieve old batteries to protect our environment.

Do not store the battery pack together with metal objects (short circuit risk).

Rechargeable batteries are to be removed from the appliance before being charged;

If the appliance is to be stored unused for a long period, the batteries should be removed.

Exhausted batteries are to be removed from the appliance and safely disposed of.

The supply terminals are not to be short-circuited.



V

TRANSPORTING LITHIUM BATTERIES

Lithium-ion batteries are subject to the Dangerous Goods Legislation requirements.

Transportation of those batteries has to be done in accordance with local, national and international provisions and regulations.

The user can transport the batteries by road without further requirements.

Commercial transport of Lithium-Ion batteries by third parties is subject to Dangerous Goods regulations. Transport preparation and transport are exclusively to be carried out by appropriately trained persons and the process has to be accompanied by corresponding experts.

When transporting batteries:

Ensure that battery contact terminals are protected and insulated to prevent short circuit. Ensure that battery pack is secured against movement within packaging. Do not transport batteries that are cracked or leak. Check with forwarding company for further advice



SYMBOLS



Please read the instructions carefully before starting the machine.



Wear ear protectors!



Always wear goggles when using the machine.



Risk of Bursting.



CAUTION! WARNING! DANGER!



Remove the battery pack before starting any work on the appliance.



Do not dispose electric tools, batteries/rechargeable batteries together with household waste material. Electric tools and batteries that have reached the end of their life must be collected separately and returned to an environmentally compatible recycling facility. Check with your local authority or retailer for recycling advice and collection point.



Voltage



Direct Current



European Conformity Mark



British Conformity Mark



Ukraine Conformity Mark



EurAsian Conformity Mark

Copyright 2020
Techtronic Industries GmbH
Max-Eyth-Straße 10
71364 Winnenden
Germany
+49 (0) 7195-12-0
www.milwaukeeetool.eu

Techtronic Industries (UK) Ltd
Fieldhouse Lane
Marlow Bucks SL7 1HZ
UK



**EAC UK
CA**

(11.20)

4100 4254 02